



## **RAIL HANDLER SG SERIES - SAFER. SMARTER. SECURE.**

The **DymaxRail Handler SG** handles rail up to 50 feet in length and provides improved safety and performance. Unlike rail that slides out from Grapples the Dymax Rail Handler SG features an over center lock design with ensuring positive grip when handling all types of rail and insulated joints commonly known as IJs. Unload railcars or place rail to and from collective piles. The Rail Handler SG can be adapted to grapple trucks, backhoe loaders and excavators. Contact DymaxRail Sales for more information.

**SG60 for  
EXCAVATOR**

**SG360 for  
GRAPPLE TRUCK**

**SGTRQ - for  
TILTROTATOR**

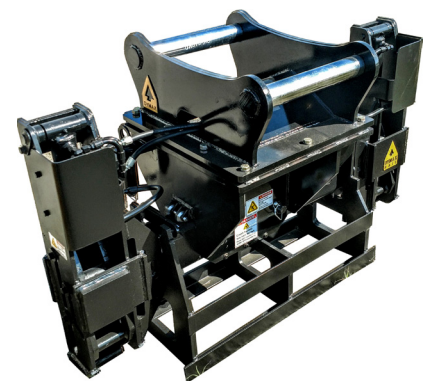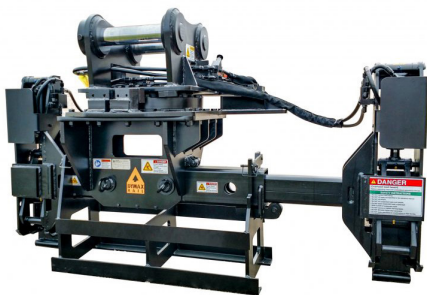

# SAFER. MORE RELIABLE HANDLE INSULATED JOINTS



Model ID	Model Code	Description	Weight LBS
102900	DX-RH-SG60-68inx93in-HX-12T	Rail Handler – Small Grapple 60 deg rotate – 68 inches collapsed x 93 inches extended – Hydraulic Excavator – 12 Ton	2200
102902	DX-RH-SG360-68inx93in-GT-10	Rail Handler – Small Grapple 360 deg rotate – 68 inches collapsed x 93 inches extended – Grapple Truck – Class 10	1500
102904	DX-RH-SGTRQ-68inx93in-HX-12T	Rail Handler – Small Grapple Tiltrotator Hookup – 68 inches collapsed x 93 inches extended – Hydraulic Excavator – 12 Ton	1200

Design and specifications are subject to change without notice.  
Contact DymaxRail for more information related to specifications or custom design solutions.



**DYMAXRAIL** | Toll Free: 800.530.5407 (USA/CAN)  
402 Miller Drive | Office: +1.785.456.2081  
Wamego, KS 66547 USA | Fax: +1.785.456.8328

[www.DYMAXRAIL.com](http://www.DYMAXRAIL.com)  
[sales@DYMAXRAIL.com](mailto:sales@DYMAXRAIL.com)